


# InterlockingRock® PANELS

MADE IN THE USA

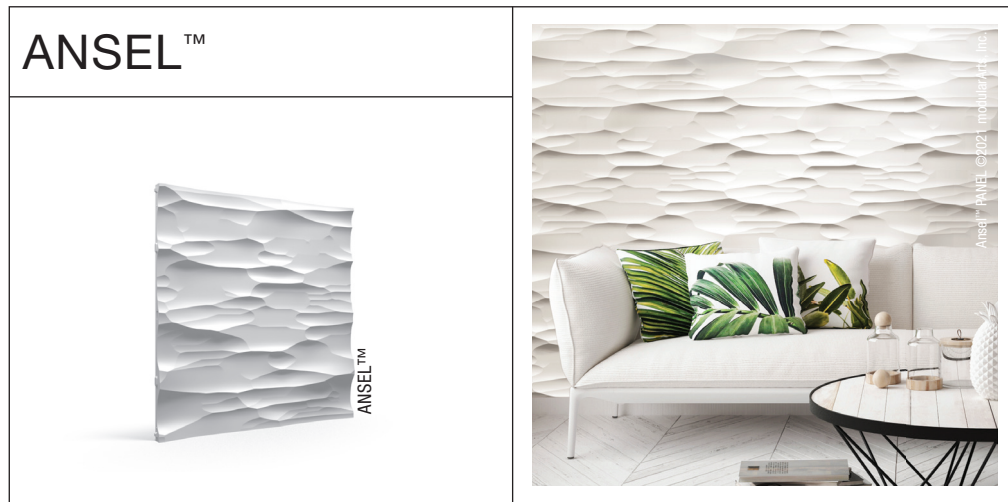

DESIGN NAME	ANSEL™ PANEL ©2021 modularArts, Inc.
DIMENSIONS	32" X 32"
THICKNESS	¼" MINIMUM TO 1-1/2" MAXIMUM
ORIENTATION	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
WEIGHT	1.8 LBS/SQ FT
DESIGN REPEAT	32"
MATERIAL	GRG (GLASS REINFORCED GYPSUM) 100% NON-COMBUSTIBLE MINERAL
FEATURES	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
APPLICATION	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
<b>INSTALLATION SUMMARY</b> <ul style="list-style-type: none"><li>· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).</li><li>· ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED.</li><li>· SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND.</li><li>· SEAMS ARE SANDED.</li><li>· SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER.</li><li>· DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE).</li></ul>	
<b>ADDITIONAL NOTES</b> <ul style="list-style-type: none"><li>· ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.</li><li>· A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.</li></ul>	

12/06/23

**modulararts®**

modularArts, Inc. | 206.788.4210  
8207 South 192nd Street | Kent, WA 98032  
modulararts.com | info@modulararts.com

**modulararts®**