


InterlockingRock[®] PANELS

MADE IN THE USA

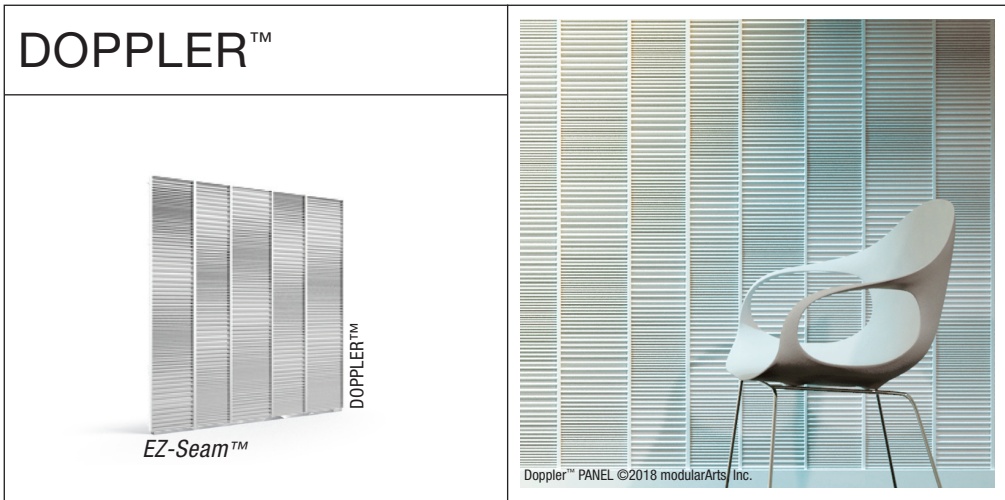

DESIGN NAME	DOPPLER™ PANEL ©2018 modularArts, Inc.
DIMENSIONS	32" X 32"
THICKNESS	¼" MINIMUM TO 1" MAXIMUM
ORIENTATION	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
WEIGHT	1.9 LBS/SQ FT
DESIGN REPEAT	32"
MATERIAL	GRG (GLASS REINFORCED GYPSUM) 100% NON-COMBUSTIBLE MINERAL
FEATURES	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
APPLICATION	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
INSTALLATION SUMMARY	<ul style="list-style-type: none"> · PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL). · SEAMS ARE CAULKED WITH A MINIMAL BEAD. (50 YEAR, WHITE, PAINTABLE RECOMMENDED) · MOUNT-POINTS ARE FILLED AND SANDED WITH THE APPROVED FILLER: DAP All-Purpose Spackling Paste (AVAILABLE AT HOME DEPOT). FILLER MATCHES THE PANEL COLOR. · OPTIONAL (FOR PAINT OR EXTRA PROTECTION): SURFACE IS SEALED WITH CLEAR MATTE SEALER. OR IF PAINTING, A PRIMER/SEAL IS REQUIRED. FLAT PAINT IS RECOMMENDED, AND SPRAY APPLICATION PROVIDES THE BEST RESULTS.
ADDITIONAL NOTES	<ul style="list-style-type: none"> - 20-30 MINUTES PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME OF CAULKING NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME. - A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.

12/06/23

modulararts[®]

modularArts, Inc. | 206.788.4210
 8207 South 192nd Street | Kent, WA 98032
 modulararts.com | info@modulararts.com

modulararts[®]