


InterlockingRock® PANELS

MADE IN THE USA

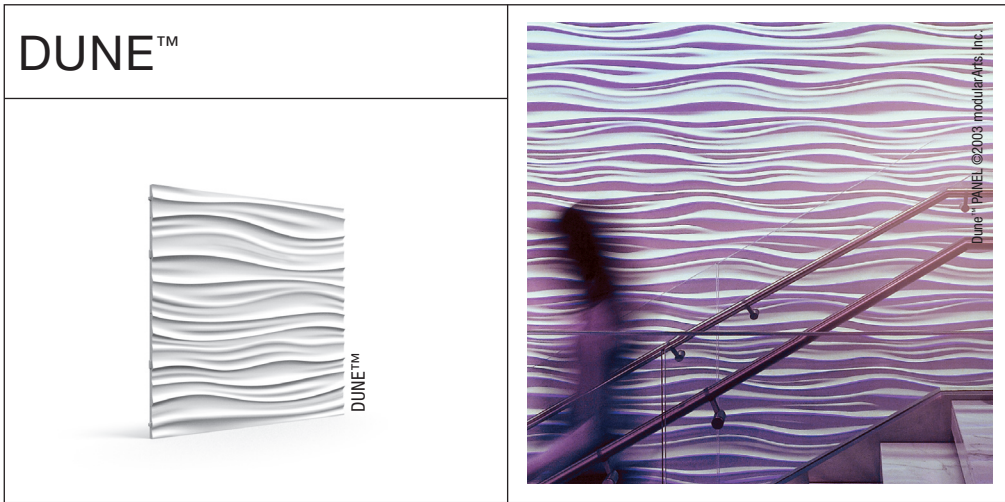

DESIGN NAME	DUNE™ PANEL ©2003 modularArts, Inc.
DIMENSIONS	32" X 32"
THICKNESS	¼" MINIMUM TO 1" MAXIMUM
ORIENTATION	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
WEIGHT	1.7 LBS/SQ FT
DESIGN REPEAT	32"
MATERIAL	GRG (GLASS REINFORCED GYPSUM) WITH LIGHTWEIGHT PLANT-BASED FOAM CORE
FEATURES	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
APPLICATION	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
INSTALLATION SUMMARY	<ul style="list-style-type: none"> · PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL). · ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED. · SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND. · SEAMS ARE SANDED. · SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER. · DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE).
ADDITIONAL NOTES	<ul style="list-style-type: none"> · ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME. · A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.

modulararts®
 modularArts, Inc. | 206.788.4210
 944 NW Leary Way | Seattle, WA 98107
 modulararts.com | info@modulararts.com

modulararts®