


InterlockingRock® PANELS

MADE IN THE USA

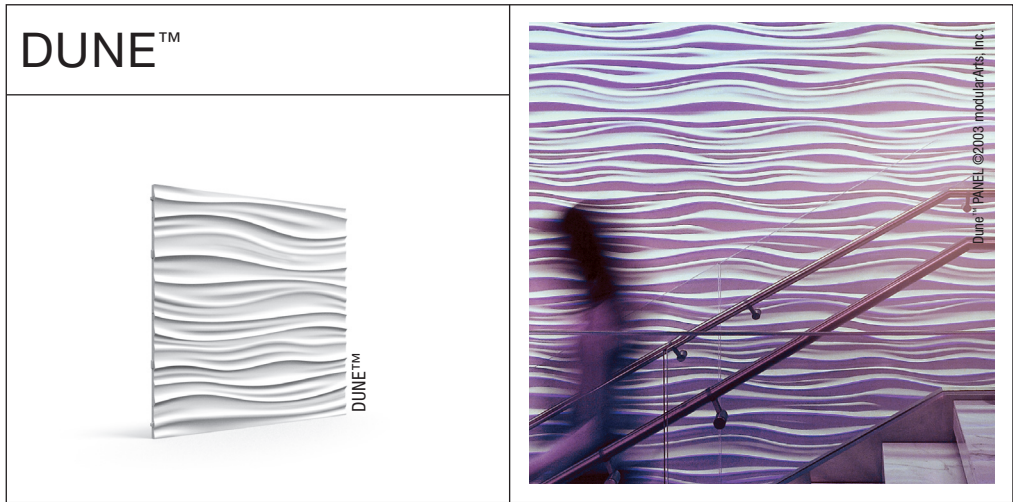

| | |
|--|--|
| DESIGN NAME | DUNE™ PANEL ©2003 modularArts, Inc. |
| DIMENSIONS | 32" X 32" |
| THICKNESS | ¼" MINIMUM TO 1" MAXIMUM |
| ORIENTATION | CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW. |
| WEIGHT | 1.7 LBS/SQ FT |
| DESIGN REPEAT | 32" |
| MATERIAL | GRG (GLASS REINFORCED GYPSUM) 100% NON-COMBUSTIBLE MINERAL |
| FEATURES | PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS. |
| APPLICATION | NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS. |
| INSTALLATION SUMMARY <ul style="list-style-type: none">· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).· ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED.· SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND.· SEAMS ARE SANDED.· SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER.· DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE). | |
| ADDITIONAL NOTES <ul style="list-style-type: none">· ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.· A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER. | |

12/06/23