


# InterlockingRock<sup>®</sup> PANELS

MADE IN THE USA

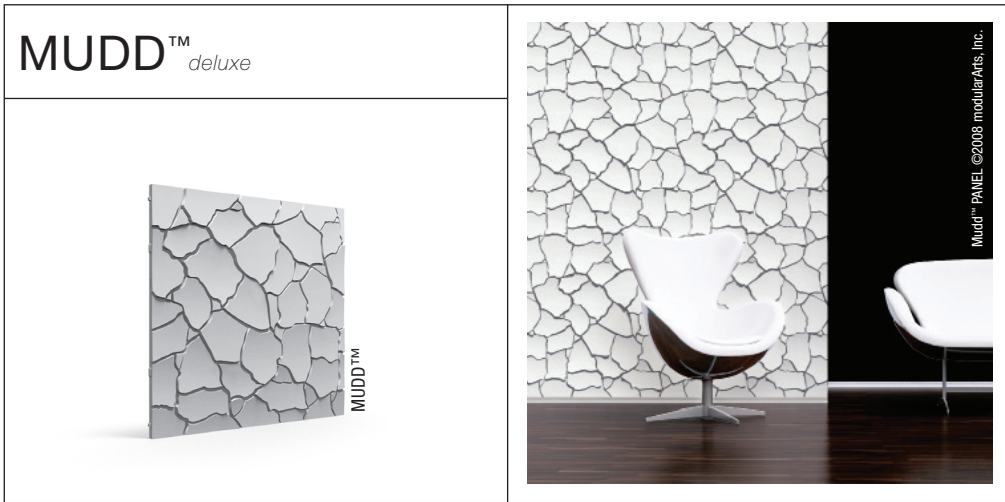

<b>DESIGN NAME</b>	MUDD™ PANEL ©2008 modularArts, Inc.
<b>DIMENSIONS</b>	32" X 32"
<b>THICKNESS</b>	¼" MINIMUM TO 1" MAXIMUM
<b>ORIENTATION</b>	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
<b>WEIGHT</b>	3.4 LBS/SQ FT
<b>DESIGN REPEAT</b>	32"
<b>MATERIAL</b>	GRG (GLASS REINFORCED GYPSUM) WITH LIGHTWEIGHT CLASS A FOAM CORE
<b>FEATURES</b>	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
<b>APPLICATION</b>	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
<b>INSTALLATION SUMMARY</b>	<ul style="list-style-type: none"> <li>· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).</li> <li>· ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED.</li> <li>· SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND.</li> <li>· SEAMS ARE SANDED.</li> <li>· SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER.</li> <li>· DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE).</li> </ul>
<b>ADDITIONAL NOTES</b>	<ul style="list-style-type: none"> <li>· ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.</li> <li>· A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.</li> </ul>

**modulararts<sup>®</sup>**

modularArts, Inc. | 206.788.4210  
 2400 NW 80th St, #106 | Seattle, WA 98117  
 modulararts.com | info@modulararts.com

modulararts<sup>®</sup>