


# InterlockingRock<sup>®</sup> PANELS

MADE IN THE USA

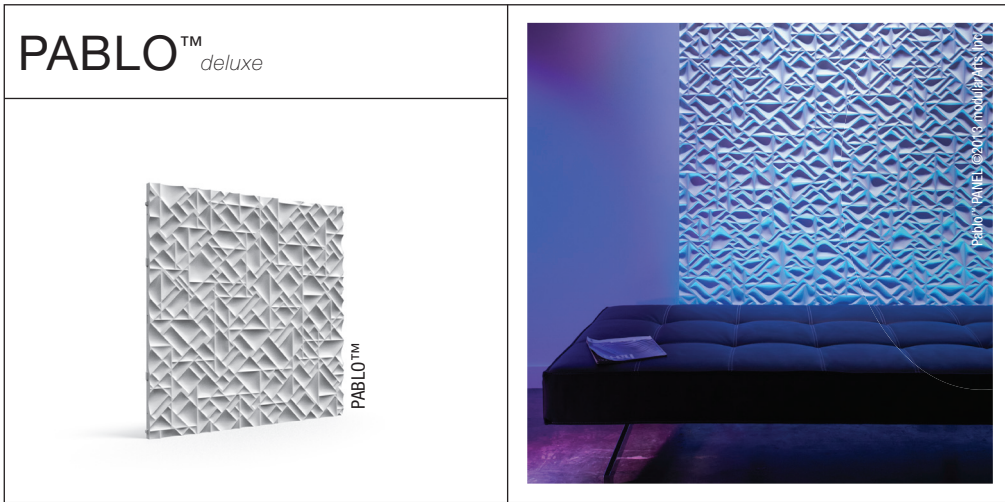

|                             |   |
|-----------------------------|---|
| <b>DESIGN NAME</b>          | PABLO™ PANEL ©2013 modularArts, Inc.  |
| <b>DIMENSIONS</b>           | 32" X 32"   |
| <b>THICKNESS</b>            | ¼" MINIMUM TO 1" MAXIMUM  |
| <b>ORIENTATION</b>          | CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.  |
| <b>WEIGHT</b>               | 1.9 LBS/SQ FT   |
| <b>DESIGN REPEAT</b>        | 32"   |
| <b>MATERIAL</b>             | GRG (GLASS REINFORCED GYPSUM) WITH LIGHTWEIGHT CLASS A FOAM CORE  |
| <b>FEATURES</b>             | PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.   |
| <b>APPLICATION</b>          | NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.  |
| <b>INSTALLATION SUMMARY</b> | <ul style="list-style-type: none"> <li>· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).</li> <li>· ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED.</li> <li>· SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND.</li> <li>· SEAMS ARE SANDED.</li> <li>· SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER.</li> <li>· DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE).</li> </ul> |
| <b>ADDITIONAL NOTES</b>     | <ul style="list-style-type: none"> <li>· ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.</li> <li>· A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.</li> </ul>   |

**modulararts<sup>®</sup>**

modularArts, Inc. | 206.788.4210  
 2400 NW 80th St, #106 | Seattle, WA 98117  
 modulararts.com | info@modulararts.com

**modulararts<sup>®</sup>**