


InterlockingRock® TILES

MADE IN THE USA

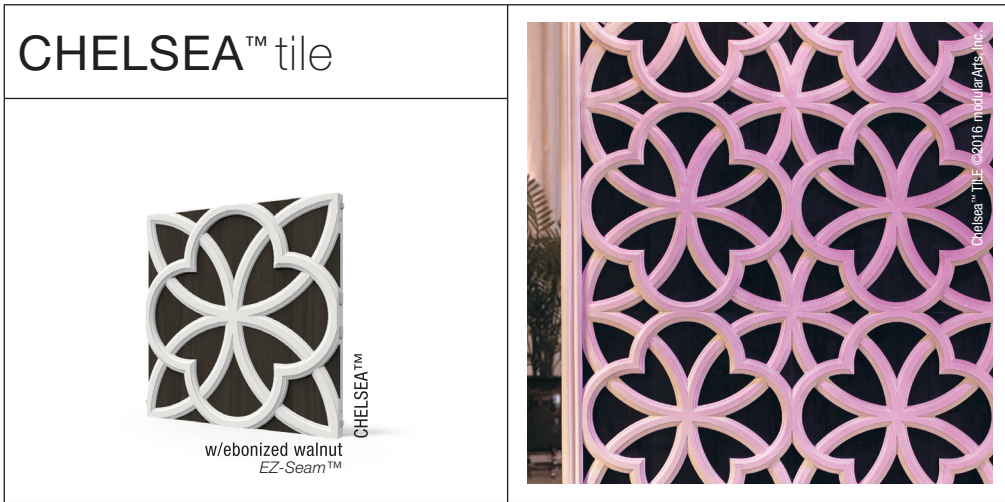

DESIGN NAME	CHELSEA™ TILE ©2016 MODULARARTS, INC.
DIMENSIONS	16" X 16"
THICKNESS	¼" MINIMUM TO 1" MAXIMUM
ORIENTATION	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY
WEIGHT	~ 3 LBS/SQ FT
DESIGN REPEAT	16"
MATERIAL	GRG (GLASS REINFORCED GYPSUM) WITH LIGHTWEIGHT PLANT-BASED FOAM CORE
FEATURES	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
APPLICATION	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES. DO NOT APPLY DIRECTLY TO STUDS.
INSTALLATION SUMMARY	<ul style="list-style-type: none"> · TILES ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL OR OFTEN PLYWOOD). · OPTIONAL (FOR EXTRA PROTECTION): SURFACE IS SEALED WITH CLEAR MATTE SEALER. SPRAY APPLICATION PROVIDES THE BEST RESULTS. · SEAMS ARE CAULKED WITH A MINIMAL BEAD. (50 YEAR, WHITE, PAINTABLE RECOMMENDED) · INSERTS ARE APPLIED BY A DURABLE ADHESIVE TAPE WHICH COMES ON THE BACK OF EACH INSERT.
ADDITIONAL NOTES	<ul style="list-style-type: none"> · WALNUT INSERTS ARE NOT SEALED, BUT MAY BE SEALED AFTER INSTALL ALONG WITH THE TILE IF DESIRED. · INSERTS ARE APPLIED AFTER INSTALLATION. WITH THE MIRROR, THIS OFFERS AN OPPORTUNITY TO SEAL THE PLASTER PART OF THE TILE (PRIOR TO ADDING THE INSERTS). · IT IS NOTABLE THAT THE INSERTS BRIDGE THE SEAMS AND AT THE SAME TIME COVER THE MOUNT-POINTS. · INSERTS WILL COME WITH ADHESIVE TAPE APPLIED TO THE BACK. SHIPPED WITH THE TILES. · THE MIRROR INSERTS HAVE A PROTECTIVE FILM TO PREVENT SCRATCHING (REMOVED BY INSTALLER). · 30 MINUTES SHOULD BE ALLOTTED ALLOWED TO BRING THE INSTALLATION TO A PAINT-READY STATE. (DRYING TIME OF CAULKING IS NOT INCLUDED.) EXPERIENCE MAY SHORTEN INSTALLATION TIME.

modulararts®

modularArts, Inc. | 206.788.4210
2400 NW 80th St, #106 | Seattle, WA 98117
modulararts.com | info@modulararts.com

modulararts®