


# InterlockingRock® PANELS

MADE IN THE USA

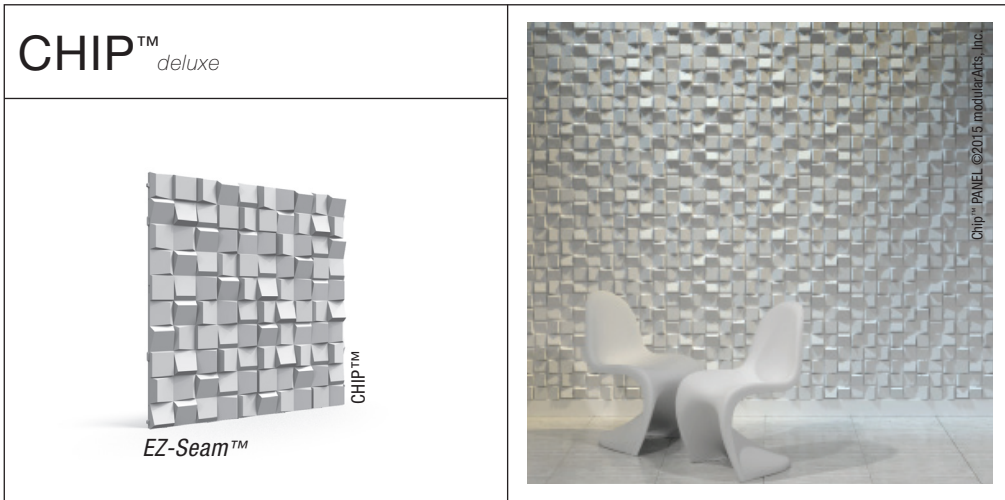

<b>DESIGN NAME</b>	CHIP™ PANEL ©2015 modularArts, Inc.
<b>DIMENSIONS</b>	32" X 32"
<b>THICKNESS</b>	¼" MINIMUM TO 1.5" MAXIMUM
<b>ORIENTATION</b>	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
<b>WEIGHT</b>	1.9 LBS/SQ FT
<b>DESIGN REPEAT</b>	32"
<b>MATERIAL</b>	GRG (GLASS REINFORCED GYPSUM) WITH LIGHTWEIGHT CLASS A FOAM CORE
<b>FEATURES</b>	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
<b>APPLICATION</b>	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
<b>INSTALLATION SUMMARY</b>	<ul style="list-style-type: none"> <li>· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).</li> <li>· SEAMS ARE CAULKED WITH A MINIMAL BEAD. (50 YEAR, WHITE, PAINTABLE RECOMMENDED)</li> <li>· MOUNT-POINTS ARE FILLED AND SANDED WITH THE APPROVED FILLER: <a href="#">DAP All-Purpose Spackling Paste</a> (AVAILABLE AT HOME DEPOT). FILLER MATCHES THE PANEL COLOR.</li> <li>· OPTIONAL (FOR PAINT OR EXTRA PROTECTION): SURFACE IS SEALED WITH CLEAR MATTE SEALER. OR IF PAINTING, A PRIMER/SEAL IS REQUIRED. FLAT PAINT IS RECOMMENDED, AND SPRAY APPLICATION PROVIDES THE BEST RESULTS.</li> </ul>
<b>ADDITIONAL NOTES</b>	<ul style="list-style-type: none"> <li>- 20-30 MINUTES PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME OF CAULKING NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.</li> <li>- A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.</li> </ul>

**modulararts®**

modularArts, Inc. | 206.788.4210  
 2400 NW 80th St, #106 | Seattle, WA 98117  
 modulararts.com | info@modulararts.com

modulararts®