


InterlockingRock® PANELS

MADE IN THE USA

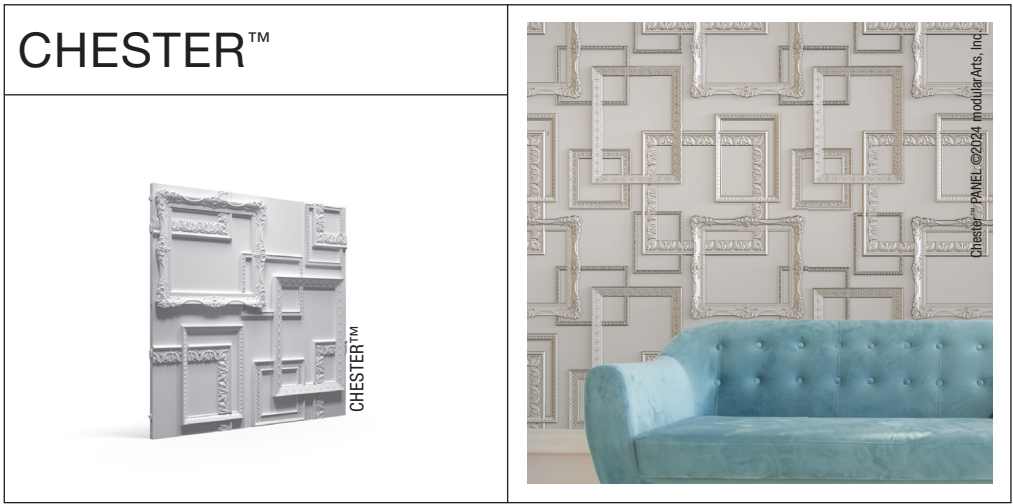

DESIGN NAME	CHESTER™ PANEL ©2024 modularArts, Inc.
DIMENSIONS	32" X 32"
THICKNESS	½" MINIMUM TO 1.5" MAXIMUM
ORIENTATION	CAN BE INSTALLED VERTICALLY OR HORIZONTALLY. "THIS SIDE UP" IS DEFINED ON PANELS AS THE INTENDED ORIENTATION FOR LIGHT AND SHADOW.
WEIGHT	3 LBS/SQ FT
DESIGN REPEAT	32"
MATERIAL	GRG (GLASS REINFORCED GYPSUM) 100% NON-COMBUSTIBLE MINERAL
FEATURES	PRECAST MOUNT-POINTS. SELF-ALIGNING EDGES WITH STEEL REINFORCED JOINTS.
APPLICATION	NEW OR EXISTING WALLS. TYPICALLY INSTALLED DIRECTLY TO DRYWALL. MAY BE APPLIED TO A VARIETY OF SUBSTRATES (PLEASE REFER TO INSTRUCTION BOOKLET). DO NOT APPLY DIRECTLY TO STUDS.
INSTALLATION SUMMARY <ul style="list-style-type: none">· PANELS ARE SCREW-MOUNTED THROUGH THE FACE TO THE SUBSTRATE (TYPICALLY DIRECT TO DRYWALL).· ALL PANEL-TO-PANEL EDGES ARE GLUED WITH APPROVED ADHESIVE AS PANELS ARE MOUNTED.· SEAMS ARE FILLED WITH THE APPROVED SPACKLING COMPOUND.· SEAMS ARE SANDED.· SURFACE IS SEALED WITH THE APPROVED PRIMER/SEALER.· DESIRED FINISH PAINT IS APPLIED (FLAT PAINT RECOMMENDED, SPRAY APPLICATION PREFERABLE).	
ADDITIONAL NOTES <ul style="list-style-type: none">· ONE MAN-HOUR PER PANEL SHOULD BE ALLOTTED TO MOUNT AND SEAM PANELS PRIOR TO PAINT. (DRYING TIME NOT INCLUDED). EXPERIENCE MAY SHORTEN INSTALLATION TIME.· A DETAILED INSTALLATION BOOKLET ACCOMPANIES EACH ORDER.	

12/03/24